Flange - Refurbishment

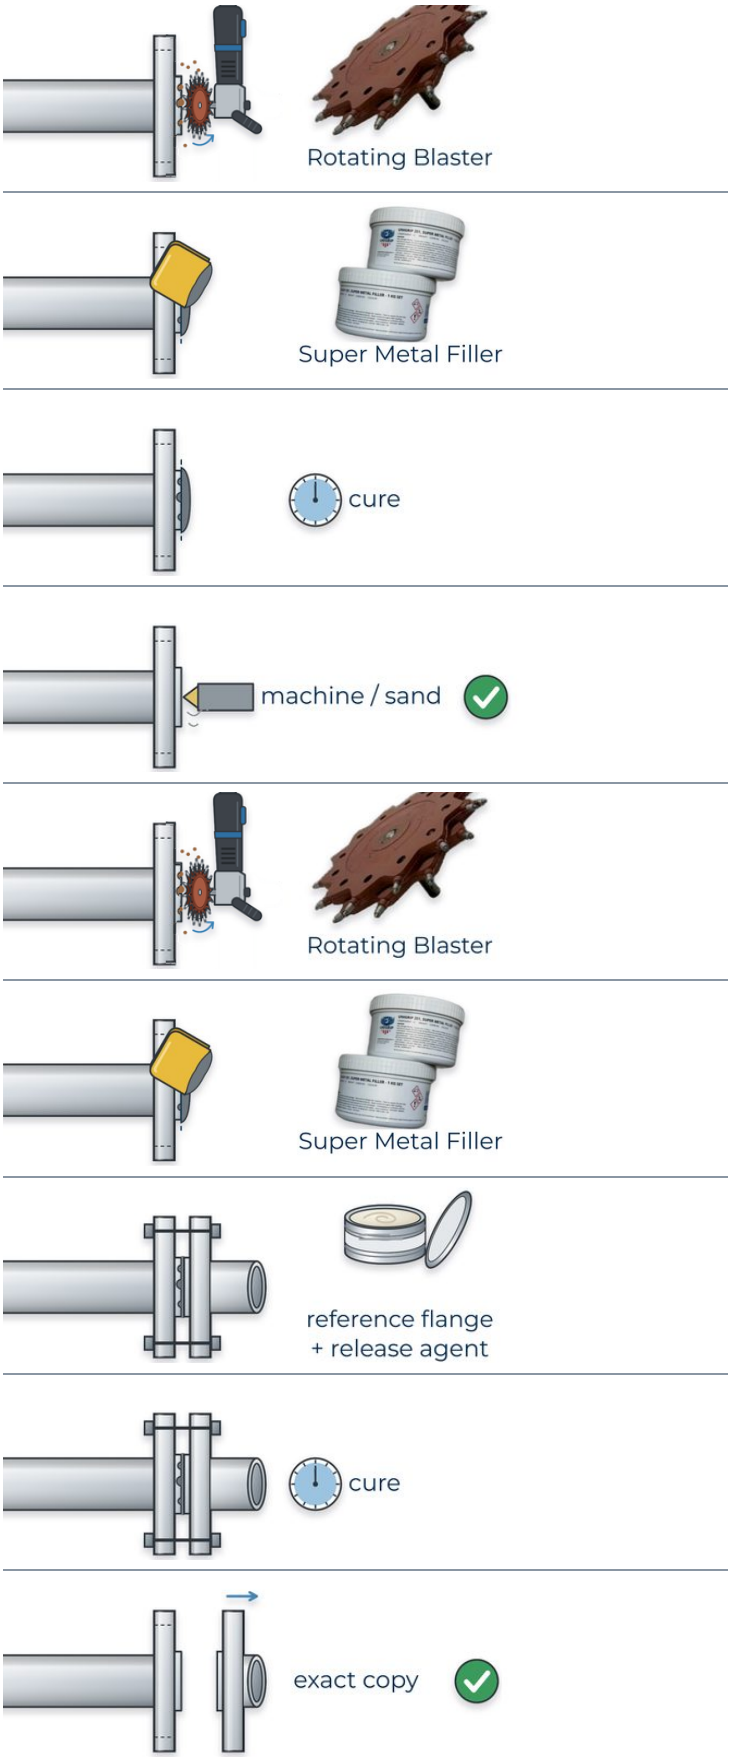

Recover damaged flange seal surfaces by using SepcoTech Super Metal Filler.

Option 1

1. Surface preparation acc. to SepcoTech standards, over the affected area.

2. Rebuild the surface to its original dimensions and structure using SepcoTech Super Metal Filler applied above original surface level.

3. Allow curing.

4. Fit to original shape and size by mechanical machining and sanding.

Option 2

1. Surface preparation acc. to SepcoTech standards, over the affected area.

2. Rebuild the surface to its original dimensions and structure using SepcoTech Super Metal Filler applied above original surface level.

3. Use a reference flange, apply Release Agent and install it on the repaired flange while the Super Metal Filler is still wet.

4. Allow curing.

5. Dismantle the reference flange and remove the excess material mechanically. The original shape has now been obtained.

Note: The use of SepcoTech Release Agent will ensure a 100% copy of the reference flange.

Includes AI generated images