Deck corrosion

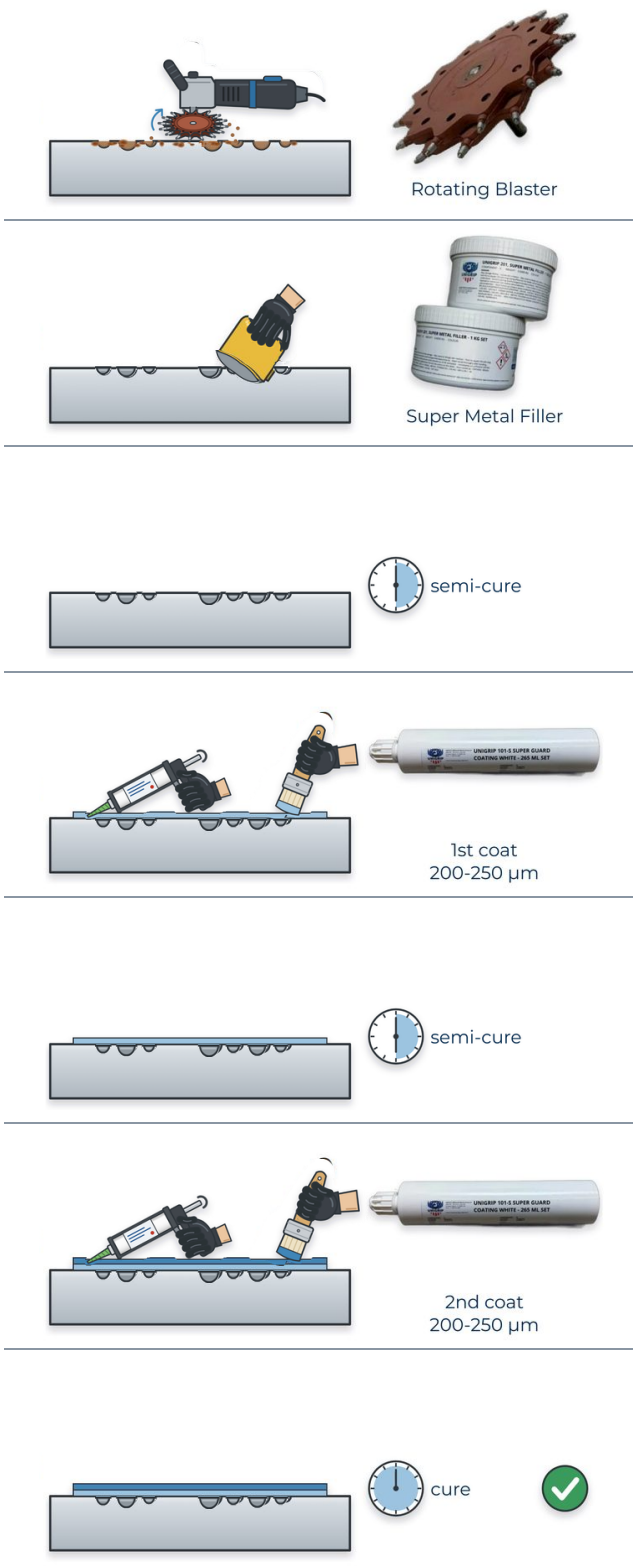

Deck Pitting due to corrosion, wear & tear often occurs and can be repaired with SepcoTech products.

1. Surface preparation acc. to our recommendations.
2. Apply SepcoTech Super Metal Filler to fill out pittings and build up surface.
3. Allow semi-curing.
4. Apply 1st layer of Aqua Guard Coating - 200-250 µm.
5. Allow semi-curing.
6. Apply 2nd layer of Aqua Guard Coating - 200-250 µm.
7. Allow curing.

Note: In cases where there are holes or very limited steel left, we recommend to use a Steel Plate as a "doubler plate" (in between the coating) to reinforce the deck.

Includes AI generated images